

L-BAR

SOLEMYO OPERA BLUEBUS 24V

Electromechanical road barrier system for control of road access.

24 Vdc gear motor with built-in control unit and loop detector.

Powerful and fast, for bars from 7 to 9 m.

Modular: bars are easily assembled using the aluminium expansion joint.

Possibility for intelligent control of two opposing automations thanks to "master/slave" function.

Strength and reliability: robust structure in steel, new high strength balancing springs guaranteed up to 1,000,000 opening and closing operations and elliptical section bar with high wind-gust resistance.

Optional flashing or traffic light can be integrated in cover.
Encoder movement control and electromechanical limit switches.
More comfort and safety in programming and maintenance phases: the separate enclosures for electronics and mechanics protect internal parts from potential risks.

Rapid and easy access to the control unit located in the upper section of the barrier body.

Simple fixture of the completely concealed photocells onto the specially designed seats on the barrier body.

More safety and reliability:

obstacle detection and monitoring of motor absorption during automation movement.

Automatic fault diagnostics during operation with consequent signalling of fault type through specific flash sequences.

Provision for connection of latest generation optical and resistive sensitive edges (with 8.2 KOhm resistance).

Energy saving: the system sets to standby when not in use to save consumption.

No blackouts: emergency backup power with the optional batteries housed inside the case.

Release from side with metal key, can be installed on either side.




FOR BARS UP TO 9 m, IRREVERSIBLE 230 Vac, 24 Vdc MOTOR, WITH FOUNDATION PLATE:

CODE	DESCRIPTION
LBAR	WITH STEEL CASE WITH PROTECTIVE CATAPHORESIS TREATMENT AND PAINT FINISH
LBARI	WITH STAINLESS STEEL CASE

TECHNICAL SPECIFICATIONS

CODE	LBAR	LBARI
ELECTRICAL DATA		
POWER SUPPLY (Vac 50/60 Hz)	230	
ABSORPTION (A)	1.3	
POWER (W)	160	
PERFORMANCE DATA		
SPEED MIN.+MAX. (S)	8 ÷ 12	
TORQUE (Nm)	400	
WORK CYCLE (CYCLES/HOUR)	150	
DIMENSIONAL AND GENERAL DATA		
PROTECTION LEVEL (IP)	44	
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50	
DIMENSIONS (mm)	500x299x1215 h	
WEIGHT (kg)	98	

DIMENSIONS

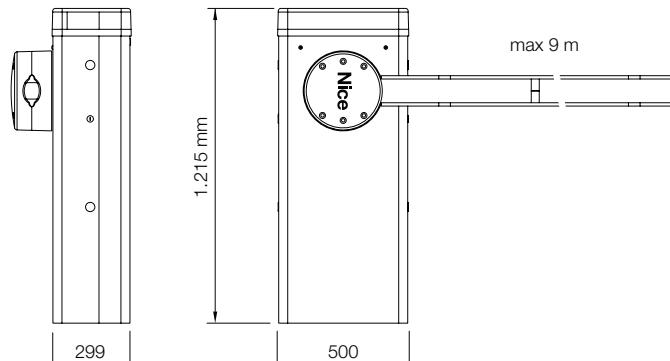

ACCESSORIES

KIT SOLEMYO



THE SOLAR POWER KIT SOLEMYO TO AUTOMATE GATES, GARAGE DOORS OR BARIER GATES INCLUDING THOSE LOCATED FAR FROM THE POWER MAINS AND WITHOUT THE NEED FOR COSTLY AND INVASIVE EXCAVATION WORK.
SEE PAGE 171



WA10
RED ADHESIVE REFLECTOR STRIPS.
PC/PACK 24



XBA13
RUBBER IMPACT PROTECTION STRIP LENGTH 1 m.
PC/PACK 9



XBA9
EXPANSION JOINT.
WHITE PAINT-FINISHED ALUMINUM BAR
69x2x5/50 mm.
PC/PACK 1



XBA14
WHITE PAINT-FINISHED ALUMINUM BAR
69x2x4/150 mm.
PC/PACK 1



XBA15
WHITE PAINT-FINISHED ALUMINUM BAR
69x2x3/150 mm.
PC/PACK 1



XBA8
INTEGRABLE TRAFFIC LIGHT.
PC/PACK 1



XBA18
INDICATOR LIGHTS FOR CLICK FIXTURE ON UPPER OR LOWER SIDE OF BAR. LENGTH 8 m.
PC/PACK 1



WA11
ADJUSTABLE STAND FOR BARS.
PC/PACK 1



WA12
MOBILE STAND FOR BARS - NEW FULLY REINFORCED VERSION.
PC/PACK 1



WA13
ALUMINUM RACK UP TO 2 m.
PC/PACK 1




XBA17
ANCHORAGE BASE WITH CLAMPS, FOR LBAR.
PC/PACK 1



XBA19
DUAL INDICATOR LIGHT FOR CLICK FIXTURE ON BAR.
PC/PACK 1



INSTALLATION DIAGRAM

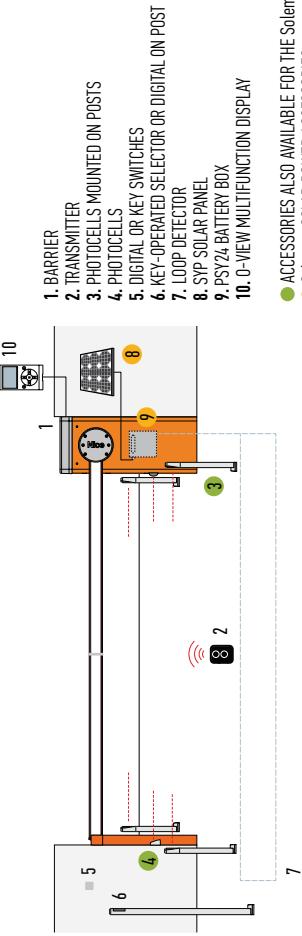

Nice recommends customers order products in pallets in order to facilitate storage and delivery, and ensure packs are uniform. The number of packs per single pallet has been specified for this reason. Approximate draft.