


ALUMINUM

ROLLING CENTER






I Carrello per cancelli autoportanti con ruote in nylon per guida G-A



- UK** Cantilever gate carriage with Nylon Polyimide for the track G-A
- D** Wagen fuer freitragende Schiebetore mit Nylon Polyamid zur Schiene G-A
- F** Chariot pour portail autoportant avec roues en Polyamide pour rail G-A
- E** Carril para portones autodezlizables con ruedas en nylon para guja G-A
- RUS** Тележка для раздвижных ворот с нейлоно-полиамидными роликами направляющей G-A

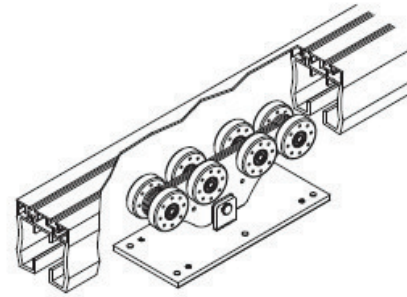

Articolo - Article	L1	Peso max cancello Gate max weight	Abbinabile Combining	
Riferimento - Reference	Max ML			N°
CA 4 RSN LP 00 80 80Z	6	350	Guida G-A	2 18

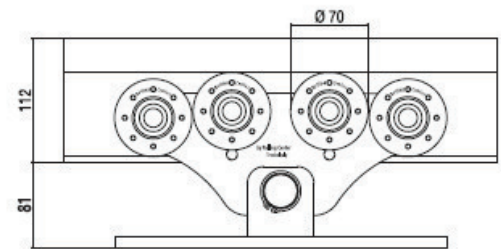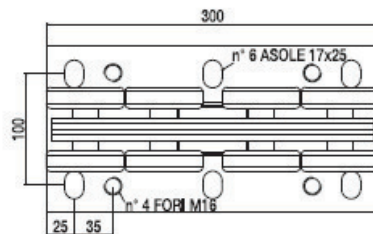

Peso max cancello Gate max weight	L1 (mt)	L2 (mt)	L4 (mt)	L5 (mt)	LT (mt)	H (mt)	E (mt)	A (mt)	B (mt)	C (mt)	Portata max carrello Carriage strength	Fondazione Armatura
350	3,0	0,9	1,9	0,20	4,9	1,7	0,3	1,9	0,6	0,5	700	4 Ø 12 4 Ø 12
350	4,0	1,2	2,2	0,20	6,2	1,7	0,3	2,2	0,6	0,5	700	4 Ø 12 4 Ø 12
350	5,0	1,5	2,5	0,20	7,5	1,7	0,3	2,5	0,8	0,5	700	4 Ø 12 4 Ø 12
350	6,0	1,8	2,8	0,20	8,8	1,7	0,3	2,8	0,8	0,5	700	4 Ø 12 4 Ø 12

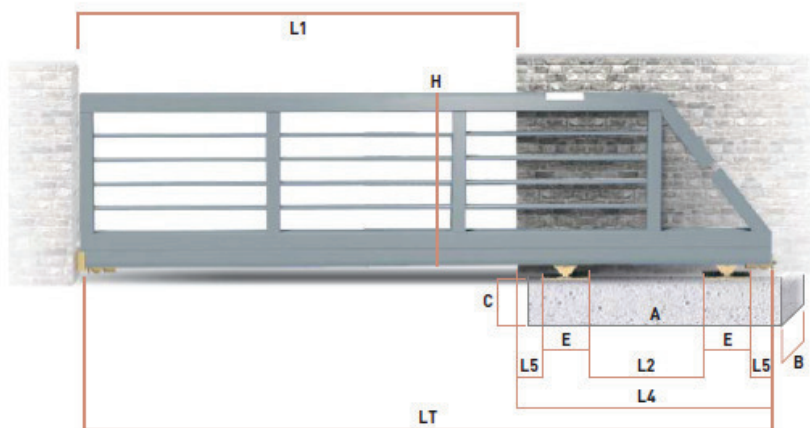

$LT = L1 + L4$ $L2 = 30\% \text{ di } L1$ $L4 = L2 + (E + L5) \times 2$

Accessori Abbinabili / Combining accessories

CA4RSN  x2	41 P  x2
50 P  x2	GA/3 - GA/6  *
4RM P  x2	Gloeck  x1

* Lunghezza guida variabile
Variable track length