

M-FAB

SOLEMYO OPERA BLUEBUS 24V 230V

For swing gates with leaves up to 3 m, underground installation.

Irreversible electromechanical gear motor, also available in 24 Vdc versions with magnetic encoder.

An even more evolved range: 3 types of electromechanical gear motors irreversible **M-Fab**.

2 foundation boxes externally chamfered, Fab Box, with mechanical stop on opening:

- in stainless steel (MECX), ideal for use in extreme conditions;
- with the **cataphoresis paint finish** (MECF), highly resistant to corrosion.

Reliable and resistant: motors made up of solid internal parts in metal. New IP67 waterproof die cast aluminium.

Total freedom of choice: release from inside and outside, two key-operated models or freely compatible lever version and easily activated with just one hand.

Simple to use: mechanical stop system on closure. Standard opening max. 110°, optional opening 360°.


Totally compatible with the previous Metro series.

Recommended control units: Mindy A6F, A60, A700F; for ME3024 Moonclever MC824H.

24 Vdc version with magnetic encoder.

Perfect for intensive use, compatible with the control unit Moonclever MC824H:

- simple programming, by means of a single key;
- self-learning of opening and closing limit positions;
- automatic fault diagnostics;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- obstacle detection with dual technology;
- operation in event of power failure by means of optional rechargeable batteries (PS324);
- provision for connection of latest generation resistive sensitive edges.

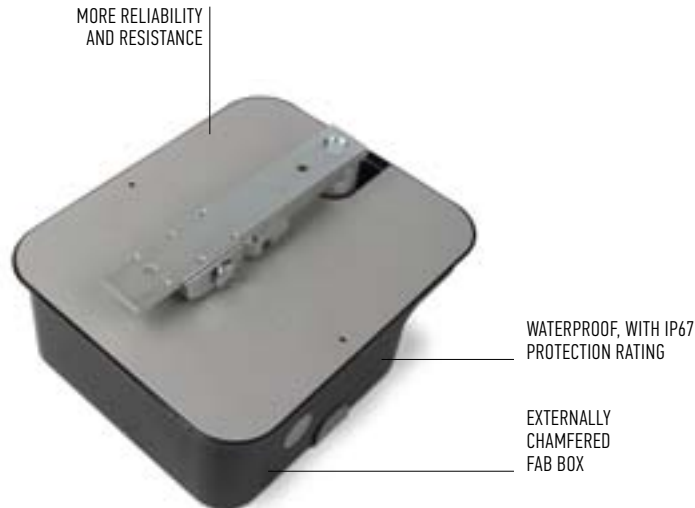

CODE	DESCRIPTION	PACK/PALLET
ME3024	IRREVERSIBLE, 24 Vdc, WITH MAGNETIC ENCODER, COMPLETE WITH CONNECTING LEVER AND MECHANICAL STOP FOR THE CLOSING MANOEUVRE	18
ME3000	IRREVERSIBLE, 230 Vac, HIGH SPEED, GREASE LUBRICATION, COMPLETE WITH CONNECTING LEVER AND MECHANICAL STOP FOR THE CLOSING MANOEUVRE	18
ME3000L	IRREVERSIBLE, 230 Vac, LOW SPEED, GREASE LUBRICATION, COMPLETE WITH CONNECTING LEVER AND MECHANICAL STOP FOR THE CLOSING MANOEUVRE	18

CODE	DESCRIPTION	PACK/PALLET
MECX	EXTERNALLY CHAMFERED FOUNDATION BOX IN STAINLESS STEEL WITH MECHANICAL STOP ON OPENING	20
MECF	EXTERNALLY CHAMFERED FOUNDATION BOX WITH CATAPHORESIS FINISH WITH MECHANICAL STOP ON OPENING	20


NOTE: key release mechanism, freely compatible with selection of models MEA2 and MEA3 motor.

TECHNICAL SPECIFICATIONS

CODE	ME3024	ME3000	ME3000L
ELECTRICAL DATA			
POWER SUPPLY (Vac 50 Hz)*	-	230	-
POWER SUPPLY (Vdc)	24	-	-
ABSORPTION (A)	5	1.2	1.3
POWER (W)	120	250	300
PERFORMANCE DATA			
SPEED (rpm)	1.4	1.14	0.8
TORQUE (Nm)	250	300	250
WORK CYCLE (CYCLES/HOUR)	76	30	20
DIMENSIONAL AND GENERAL DATA			
PROTECTION LEVEL (IP)	67		
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50		
DIMENSIONS (mm)	390x322x194.5 h		
WEIGHT (kg)	11		

*60 Hz version available on request.

UTILISATION LIMITS

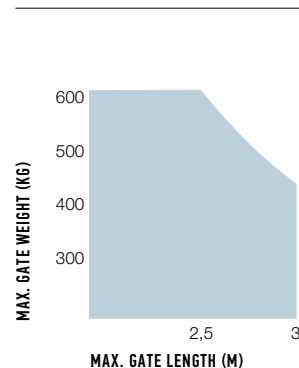

The shape, the height of the gate and the weather conditions can considerably reduce the values shown in the graph to the side. Use in windy areas 230 Vac models.

DIMENSIONS

